


# System Datasheet

## TS+

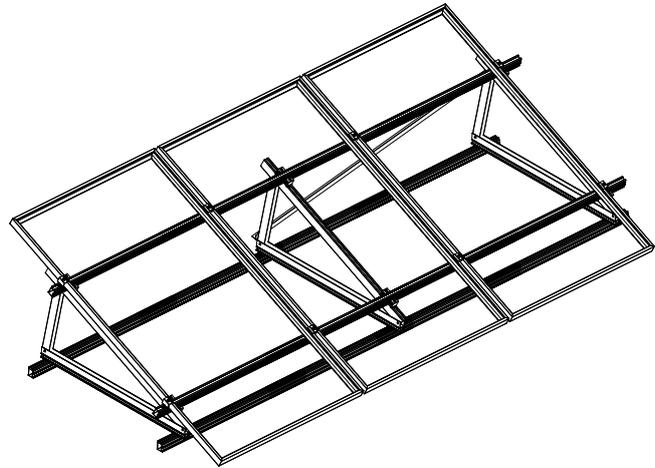

### General

System	Tri-angular module support for pitched and flat roof with roof penetration
Content	Tri-angle (pre-assembled or non-assembled), back support
System warranty	10 years
Application Area	Pitched and flat roofs on commercial, industrial and agricultural buildings
Roof covering	Sheet metal (trapezoidal/corrugated), sandwich, fibre-cement
Roof slope	Orthogonal installation to roof slope: min. 2°/max. 25°. Parallel installation with roof slope: min. 2°/max. 45°
Attachement to roof with	MS+, MS+P, VS+

### System properties

System orientation	One sided installation
Module tilt	10° to 35° in steps of 5°
Material	Stainless steel, aluminum

### Modules

Type	PV-Modules with frame height from 30 to 50mm
Module orientation	Horizontal/Landscape and vertical/Portrait
Module size (Portrait)	Length: max. 1,960 mm, Width: unlimited
Module size (Landscape)	Length: unlimited, Width: max. 1,050 mm

### Certifications

TÜV	ID:0000048970 according to 2 PFG
Static calculation	Verifiable calculations by HZI Engineering Bonn

### Services

PV layout	Provided by Renusol
-----------	---------------------